




1022 – MRK 4 mm² Rail Terminal Blocks

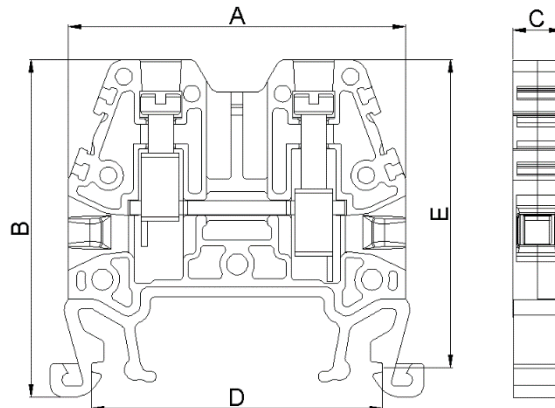

Product Name	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
MRK 4 mm²	40	40	6,6	35	36,5

General Product Information	
Isolation Material	PA 66
UL 94 Flammability	V2
Working temperature	(-40°C, +140°C)
TSE / CE Technical Data	
Voltage	750 V
Current	32 A
Cross Section	4 mm²
Norm	EN-60947-7-1
UL Technical Data	
Voltage	600 V
Current	32 A
Cross Section	10 AWG
Norm	UL 1059
Connection Information	
Connection type	Screwed
Stripping length	10 mm
Torque	0,5 Nm

Accessories:

[Rails](#)

[Stoppers](#)

[Numbering Accessories](#)

[Marking Labels](#)

[Cross Connections](#)

