




1072 – MRK 50 mm² Rail Terminal Blocks

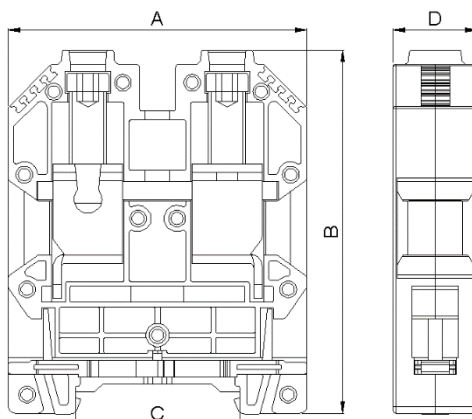

Product Name	A (mm)	B (mm)	C (mm)	D (mm)
MRK 50 mm²	63,5	74,5	35	18

General Product Information	
Isolation Material	PA 66
UL 94 Flammability	V2
Working temperature	(-40°C, +140°C)
TSE / CE Technical Data	
Voltage	750 V
Current	150 A
Cross Section	50 mm²
Norm	EN-60947-7-1
UL Technical Data	
Voltage	600 V
Current	110 A
Cross Section	0 AWG
Norm	UL 1059
Connection Information	
Connection type	Screwed
Stripping length	10 mm
Torque	6 Nm

Accessories:

[Rails](#)

[Stoppers](#)

[Numbering Accessories](#)

[Marking Labels](#)

[Cross Connections](#)

