




## 1502 – OPK 2,5 mm<sup>2</sup> PUSH-IN TYPE RAIL TERMINAL BLOCKS

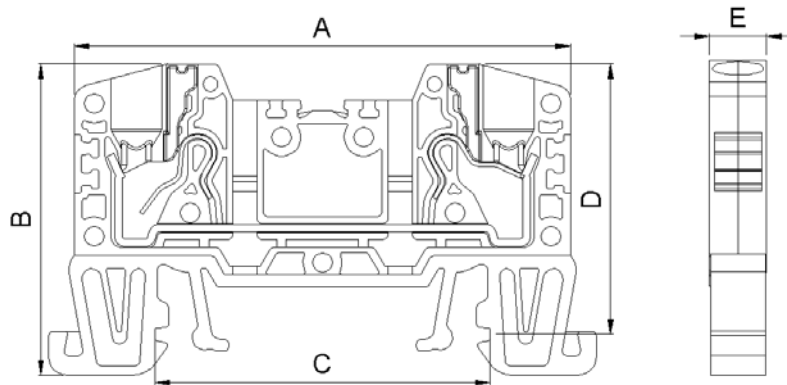

Product Name	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
<b>OPK 2,5 mm<sup>2</sup></b>	<b>51,2</b>	<b>32</b>	<b>35</b>	<b>28</b>	<b>6</b>

General Product Information	
Isolation Material	<b>PA 66</b>
UL 94 Flammability	<b>V2</b>
Working temperature	<b>(-40°C, +140°C)</b>
TSE / CE Technical Data	
Voltage	<b>750 V</b>
Current	<b>24 A</b>
Cross Section	<b>2,5 mm<sup>2</sup></b>
Norm	<b>EN-60947-7-1</b>
UL Technical Data	
Voltage	<b>600 V</b>
Current	<b>20 A</b>
Cross Section	<b>12 AWG</b>
Norm	<b>UL 1059</b>
Connection Information	
Connection type	<b>Push-in type</b>
Stripping length	<b>10 mm</b>

### Accessories:

[Rails](#)

[Stoppers](#)

[Numbering Accessories](#)

[Marking Labels](#)

[Cross Connections](#)

